

CG-1010

▶ SINGLE POINT

▶ Aluminum

CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737




CG-1010 ORDER INFORMATION PRICING^g SUGGESTED LIST PRICE

3 kg	\$170.00
5 kg	\$170.00
7 kg	\$170.00
10 kg	\$170.00
15 kg	\$170.00
20 kg	\$170.00
30 kg	\$170.00
50 kg	\$170.00
90 kg	\$170.00

INTERCHANGEABLE PRODUCTS

Rice Lake Weighing Systems.....	RL1010
Tedea.....	1010

Main Dimensions and Accessories

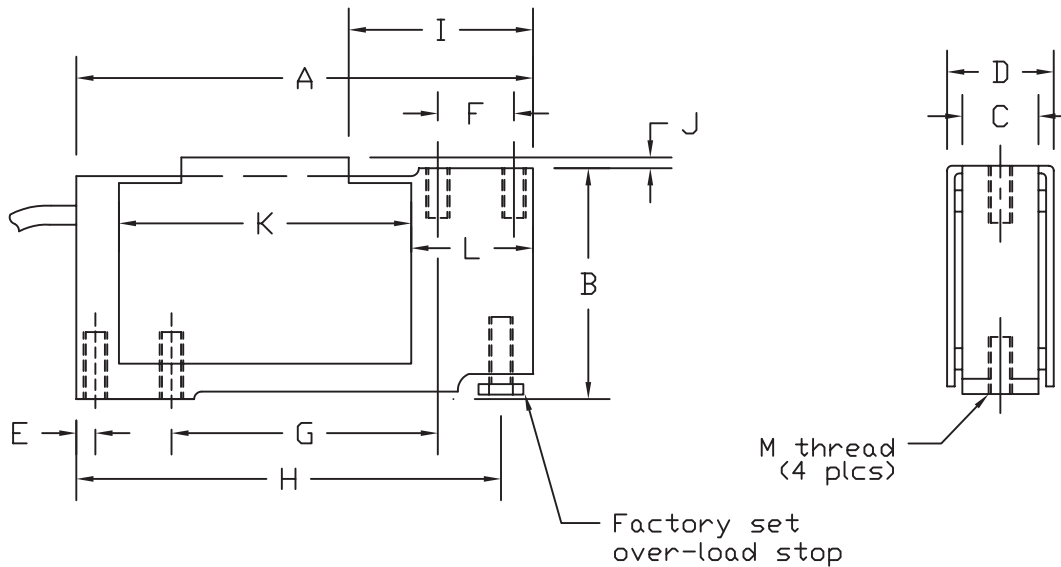

RATED CAPACITY	DIMENSIONS												
	A	B	C	D	E	F	G	H	I	J	K	L	M
3-90KG	4.65	2.48	1.00	1.32	0.30	0.75	2.55	4.35	1.34	0.12	3.15	0.96	1/4-20UNCx0.50dp

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00 +/- 10%	Input Impedance	410 +/- 10 ohms
Nonlinearity	+/- 0.03% FS	Output Impedance	350 +/- 3 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Repeatability	+/- 0.02% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.03% FS	Compensated Temperature Range	-10°C - +40°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.002% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.001% of applied load/°C	Cable Length	10' Standard Cable
Cable Color Code	Input Green +Excitation Black -Excitation	Output White +Signal Red -Signal	Seal Type Environmentally Sealed, Potted, IP67
		Max Platform Size:	400 X 400 mm