

# CG-1240-SS

▶ SINGLE POINT

▶ STAINLESS STEEL

CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737




**CG-1240-SS ORDER INFORMATION**      **PRICING<sup>ii</sup> SUGGESTED LIST PRICE**

200 Kg	\$ 350.00
250 Kg	\$ 350.00

**INTERCHANGEABLE PRODUCTS**

Tedea..... 1240

Main Dimensions and Accessories

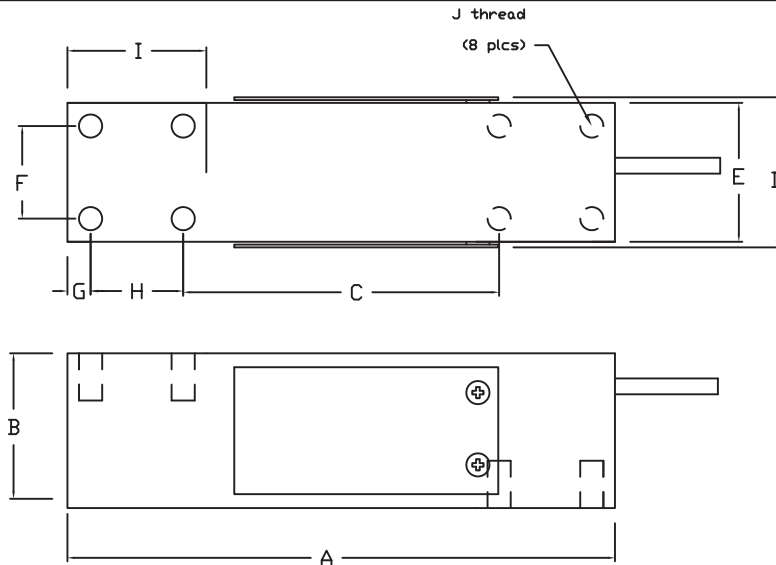

RATED CAPACITY	DIMENSIONS										
	A	B	C	D	E	F	G	H	I	J	
200KG-250KG	5.91	1.57	3.41	1.71	1.50	1.00	0.25	1.00	1.50	1/4-20UNCx0.50dp	

→ SPECIFICATIONS ←

Rated Output (mV/V)	2.00 +/- 10%	Input Impedance	385 +/- 10 ohms
Nonlinearity	+/- 0.03% FS	Output Impedance	350 +/- 3 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Repeatability	+/- 0.02% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.03% FS	Compensated Temperature Range	-10°C - +40°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.002% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.001% of applied load/°C	Cable Length	10' 6 Conductor Cable
Cable Color Code		Seal Type	Environmentally Sealed, IP67
Input	Output	Sense Leads	Max Platform Size:
Green +Excitation	White +Signal	Blue +Sense	390 X 390 mm
Black -Excitation	Red -Signal	Brown -Sense	