

CG-26S1-65114

2.00 mV/V

▶ **ROCKER COLUMN**

▶ **STAINLESS STEEL**

Hermetically Sealed
NTEP 1:10,000 Class III Multiple Cell

CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737




CG-26S1-65114 ORDER INFORMATION **PRICING** **SUGGESTED LIST PRICE**

50K	\$ 795.00
50K LE	\$ 795.00

INTERCHANGEABLE PRODUCTS

Sensortronics.....	65114
Fairbanks.....	63951

Main Dimensions and Accessories

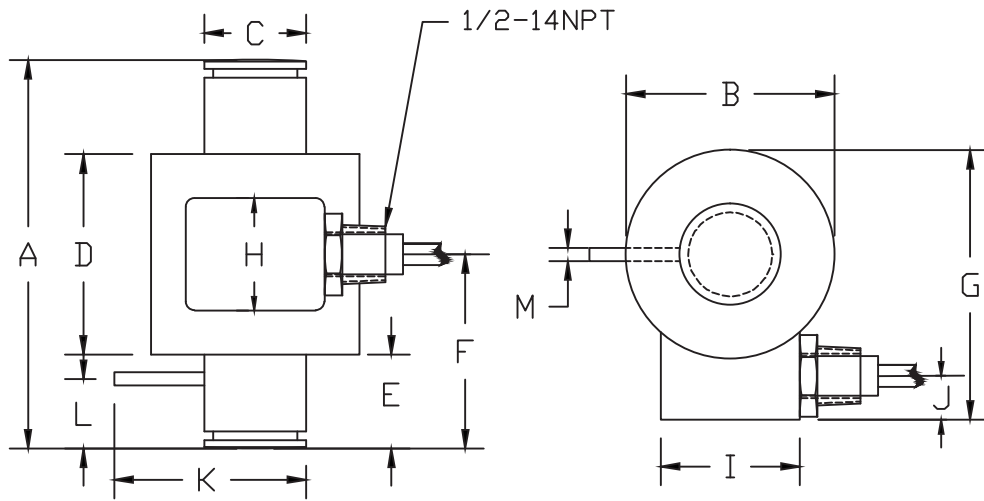

RATED CAPACITY	DIMENSIONS												
	A	B	C	D	E	F	G	H	I	J	K	L	M
50K	6.00	3.00	1.46	2.88	1.56	3.00	3.88	1.62	2.00	0.50	2.88	1.00	0.038
50KLE	7.56	3.00	1.46	2.88	2.34	3.78	3.88	1.62	2.00	0.50	2.88	1.00	0.038

▶ **SPECIFICATIONS** ◀

Rated Output (mV/V)	2.0	Input Impedance	1080 +/- 10 ohms
Nonlinearity	+/- 0.03% FS	Output Impedance	1000 +/- 5 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Repeatability	+/- 0.01% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.02% FS	Compensated Temperature Range	0° - 30°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.0027% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.0015% of applied load/°C	Cable Length	50' Braided Shield
Cable Color Code	Input Green +Excitation Black -Excitation	Output White +Signal Red -Signal	Seal Type Hermetically Sealed, IP67