


CG-40 SS

▶ POTTED SINGLE POINT

▶ STAINLESS STEEL

CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737

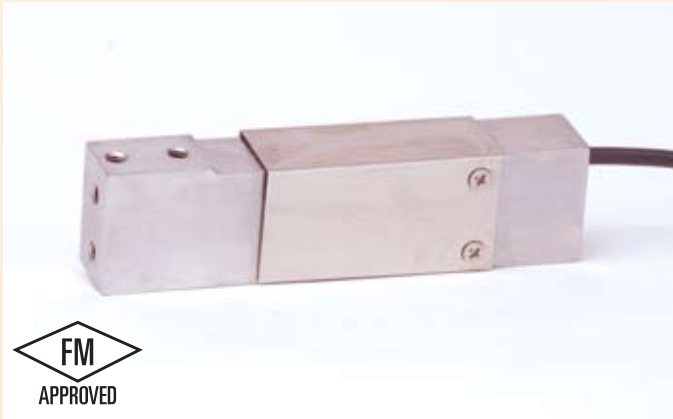


CG-40 SS ORDER INFORMATION

CG-40 SS ORDER INFORMATION	PRICING ⁱⁱ SUGGESTED LIST PRICE
10 kg	\$310.00
15 kg	\$310.00
20 kg	\$310.00
30 kg	\$310.00
50 kg	\$310.00
75 kg	\$310.00
100 kg	\$310.00
150 kg	\$310.00

INTERCHANGEABLE PRODUCTS

Rice Lake Weighing Systems.....	RL1140
Tedea.....	1140
HBM.....	PW15AH
Artech	SS60510

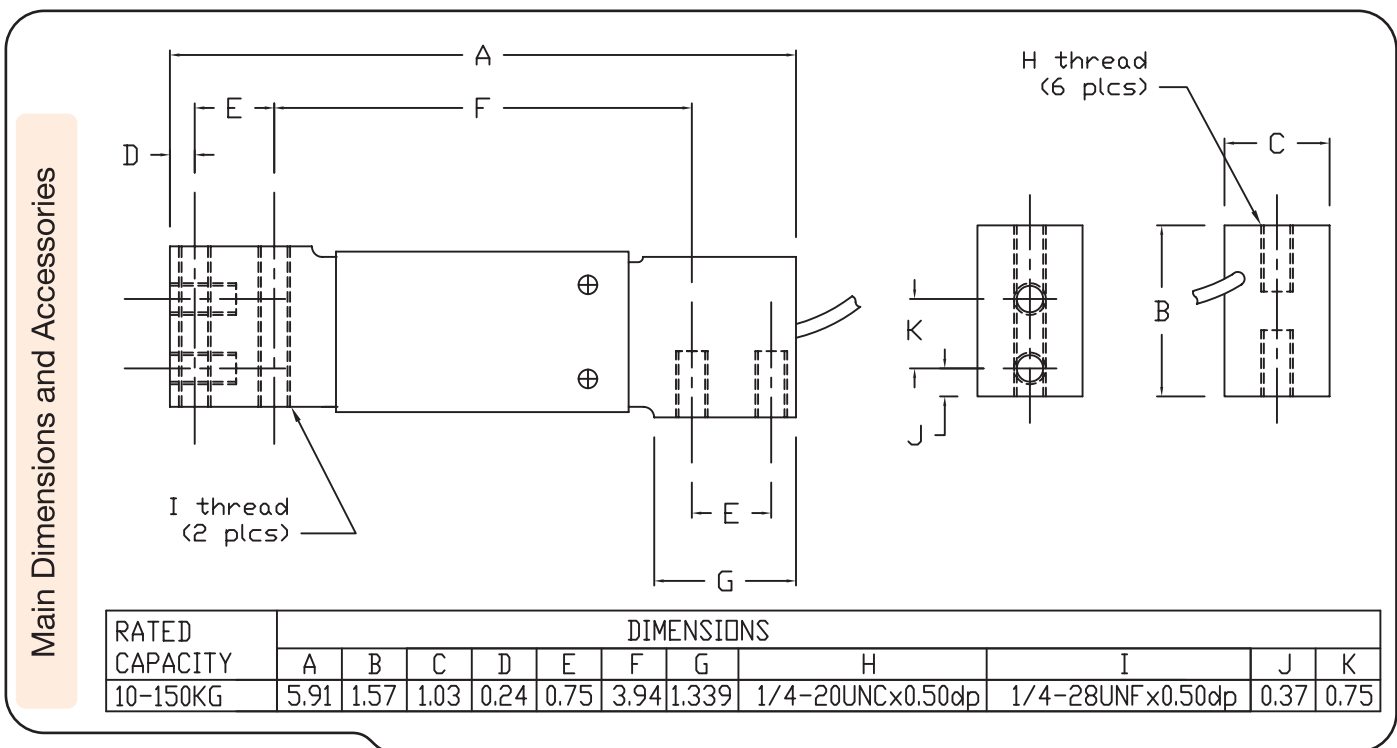

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00 +/- 10%	Input Impedance	385 +/- 10 ohms
Nonlinearity	+/- 0.03% FS	Output Impedance	350 +/- 3 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Repeatability	+/- 0.02% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.03% FS	Compensated Temperature Range	-10°C - +40°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.002% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.001% of applied load/°C	Cable Length	10' 6 Conductor Cable
Cable Color Code		Seal Type	Environmentally Sealed, Potted, IP67
Input	Output	Sense Leads	Max Platform Size:
Green +Excitation	Red +Signal	Blue +Sense	400 X 400 mm
Black -Excitation	White -Signal	Brown -Sense	