

CG-40

▶ SINGLE POINT

▶ Aluminum
NTEP 1:5,000 Class III Single Cell

CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737




CG-40 ORDER INFORMATION **PRICING# SUGGESTED LIST PRICE**

* 5 kg	\$ 165.00
* 7 kg	\$ 165.00
10 kg	\$ 165.00
15 kg	\$ 165.00
20 kg	\$ 165.00
30 kg	\$ 165.00
50 kg	\$ 165.00
75 kg	\$ 165.00
100 kg	\$ 165.00
*NON-NTEP	

INTERCHANGEABLE PRODUCTS

Rice Lake Weighing Systems.....	RL1040
Tedea.....	1040
Celtron.....	LOC
Trancell.....	FAS

Main Dimensions and Accessories

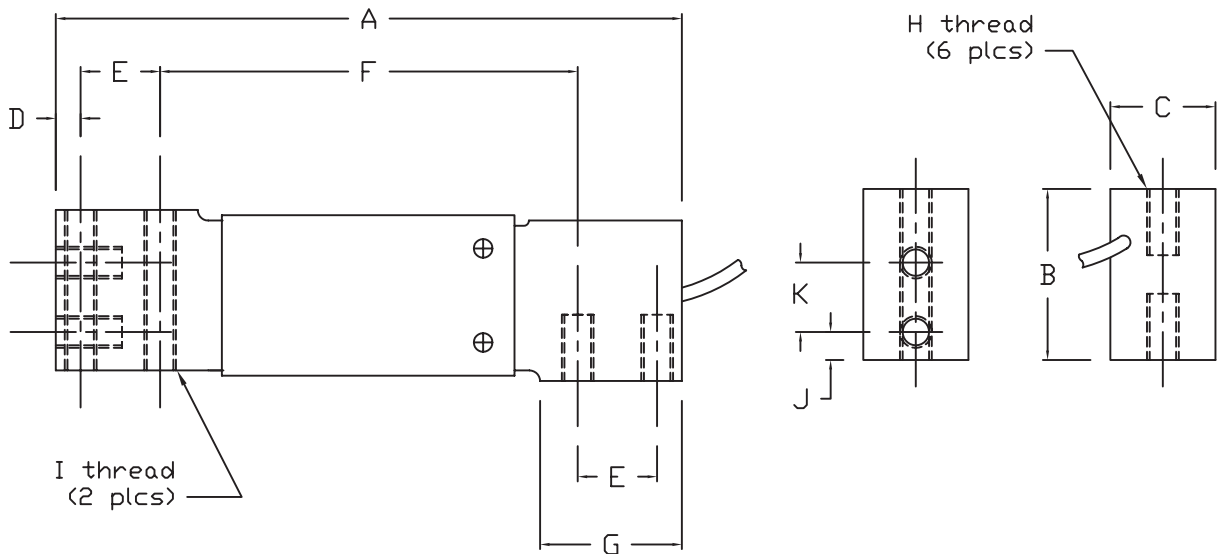

RATED CAPACITY	DIMENSIONS										
	A	B	C	D	E	F	G	H	I	J	K
5-100KG	5.91	1.57	1.03	0.24	0.75	3.94	1.339	1/4-20UNCx0.50dp	1/4-28UNF x0.50dp	0.37	0.75

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00 +/- 10%	Input Impedance	410 +/- 10 ohms
Nonlinearity	+/- 0.02% FS	Output Impedance	350 +/- 3 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Repeatability	+/- 0.02% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.03% FS	Compensated Temperature Range	-10°C - +40°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.002% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.001% of applied load/°C	Cable Length	10' 4 Conductor Cable
Cable Color Code		Seal Type	Environmentally Sealed, Potted, IP67
Input	Output	Max Platform Size:	400 X 400 mm
Green +Excitation	Red +Signal		
Black -Excitation	White -Signal		