


# CG-50-2

▶ SINGLE POINT

▶ ALUMINUM  
NTEP 1:5000 Class III Single Cell


CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737

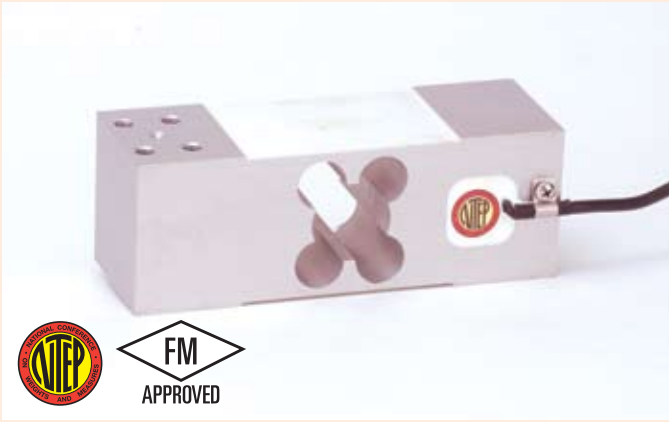

CG-50-2	ORDER INFORMATION	PRICING <sup>ii</sup>	SUGGESTED LIST PRICE
	50 kg		\$ 250.00
	100 kg		\$ 250.00
	150 kg		\$ 250.00
	200 kg		\$ 250.00
	250 kg		\$ 250.00
	300 kg		\$ 250.00
	500 kg		\$ 250.00
	* 635 kg		\$ 250.00
	* NON-NTEP		

INTERCHANGEABLE PRODUCTS	
Tedea.....	1263
Transcell.....	FAV

Main Dimensions and Accessories

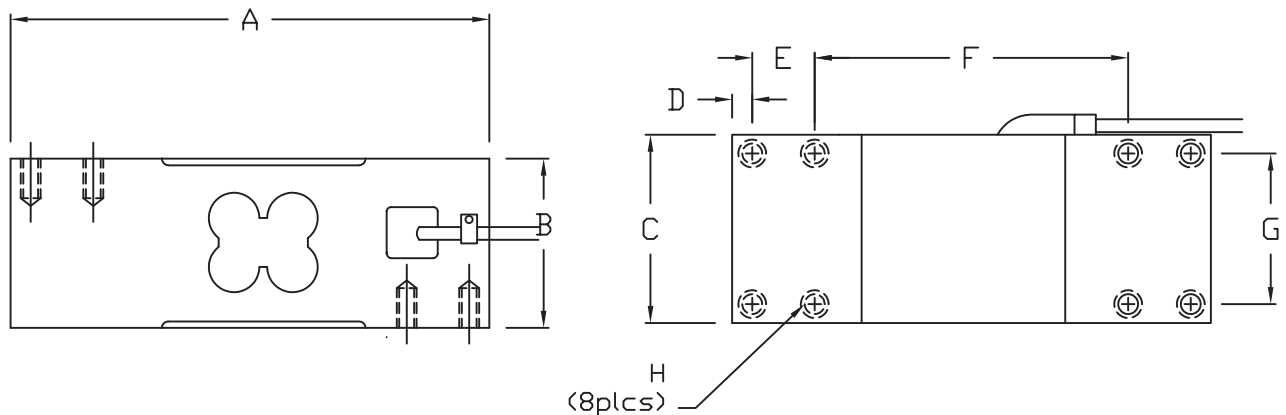

RATED CAPACITY	DIMENSIONS									
	A	B	C	D	E	F	G	H		
50-635kg	6.85	2.56	2.36	0.28	0.75	4.80	1.18	M8x1.25x0.79dp		

## ▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00	Input Impedance	410 +/- 10 ohms
Nonlinearity	+/- 0.02% FS	Output Impedance	350 +/- 3 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Repeatability	+/- 0.02% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.03% FS	Compensated Temperature Range	0°C - 30°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.002% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.001% of applied load/°C	Cable Length	10', 4 Conductor
Cable Color Code	Input	Output	Seal Type
	Green +Excitation	White +Signal	Environmentally Sealed
	Black -Excitation	Red -Signal	Max Platform Size:
			700 X 700 mm