

▶ CG-MK5

▶ SINGLE POINT

▶ ALUMINUM

CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737




CG-MK5 ORDER INFORMATION PRICINGⁱⁱ SUGGESTED LIST PRICE

62.5 lb	\$ 540.00
125 lb	\$ 540.00

INTERCHANGEABLE PRODUCTS

NCl..... Mark V

Main Dimensions and Accessories

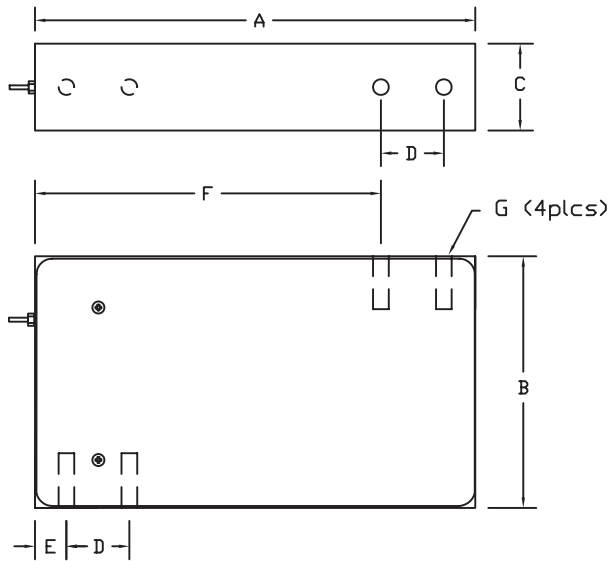

RATED CAPACITY	DIMENSIONS							
	A	B	C	D	E	F	G	
62.5-125LB	7.00	4.00	1.50	1.00	0.50	5.50	1/4-20 X 0.85 dp	

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00 +/- 10%	Input Impedance	400 +/- 10 ohms						
Nonlinearity	+/- 0.03% FS	Output Impedance	350 +/- 3 ohms						
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms						
Repeatability	+/- 0.02% FS	Excitation Voltage	10V AC/DC (20V Max)						
Creep (30 minutes)	+/- 0.03% FS	Compensated Temperature Range	-10°C - +40°C						
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C						
Temperature Effect on Zero	+/- 0.002% of rated output/°C	Safe Overload	150% FS						
Temperature Effect on Output	+/- 0.001% of applied load/°C	Cable Length	10' Standard Cable						
Cable Color Code	<table border="0"> <tr> <td>Input</td> <td>Output</td> </tr> <tr> <td>Green +Excitation</td> <td>White +Signal</td> </tr> <tr> <td>Black -Excitation</td> <td>Red -Signal</td> </tr> </table>	Input	Output	Green +Excitation	White +Signal	Black -Excitation	Red -Signal	Seal Type	Environmentally Sealed, Potted, IP67
Input	Output								
Green +Excitation	White +Signal								
Black -Excitation	Red -Signal								
		Max Platform Size:	62.5 - 125 lb: 330 X 330 mm						