


# CG-PWS

▶ SINGLE POINT

▶ STAINLESS STEEL

CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737

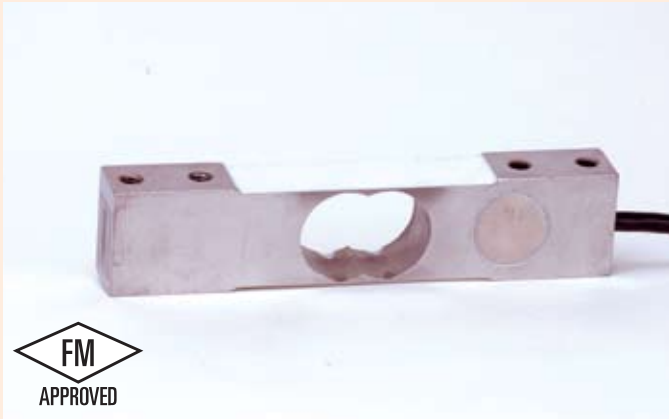


**CG-PWS ORDER INFORMATION**      **PRICING<sup>ii</sup> SUGGESTED LIST PRICE**

7 kg	\$ 275.00
10 kg	\$ 275.00
15 kg	\$ 275.00
30 kg	\$ 275.00
60 kg	\$ 275.00
100 kg	\$ 275.00
150 kg	\$ 275.00

**INTERCHANGEABLE PRODUCTS**

Rice Lake Weighing Systems.....	RL1380
HBM.....	PWS

Main Dimensions and Accessories

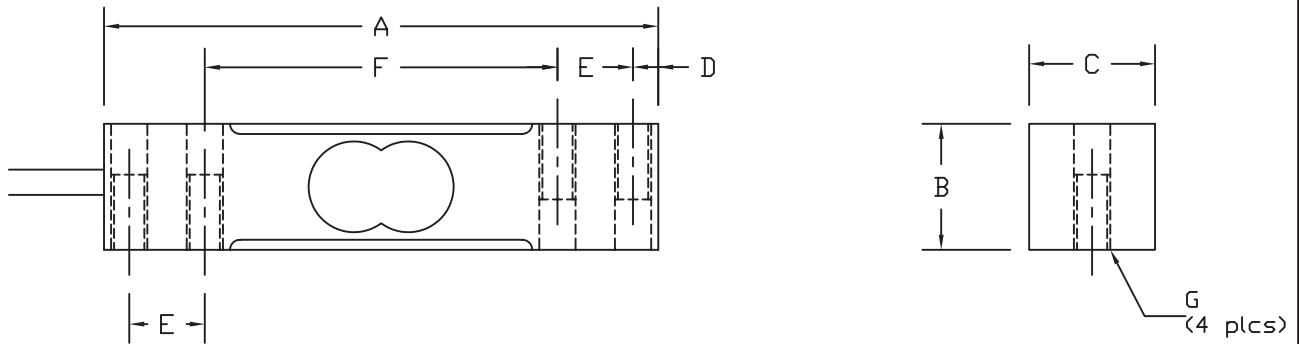

RATED CAPACITY	DIMENSIONS								
		A	B	C	D	E	F	G	
7-15KG		5.50	1.19	0.75	0.25	0.75	3.50	1/4-20UNCx0.75dp	
30-60KG		5.50	1.19	0.94	0.25	0.75	3.50	1/4-20UNCx0.75dp	
100-150KG		5.50	1.19	1.21	0.31	0.88	3.12	3/8-16UNCx0.75dp	

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00 +/- 10%	Input Impedance	385 +/- 10 ohms
Nonlinearity	+/- 0.03% FS	Output Impedance	350 +/- 3 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Repeatability	+/- 0.02% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.03% FS	Compensated Temperature Range	-10°C - +40°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.002% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.001% of applied load/°C	Cable Length	10' Standard Cable
Cable Color Code	Input                      Output	Seal Type	Environmentally Sealed, IP67
	Green +Excitation      White +Signal	Max Platform Size:	400 X 400 mm
	Black -Excitation      Red -Signal		