

# CG-SLS

▶ **DOUBLE-ENDED BEAM**

▶ **ALLOY STEEL**


**CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737**



CG-SLS ORDER INFORMATION	PRICING	SUGGESTED LIST PRICE
25K		\$ 675.00

**INTERCHANGEABLE PRODUCTS**  
Mass Load..... ML-1100

Main Dimensions and Accessories

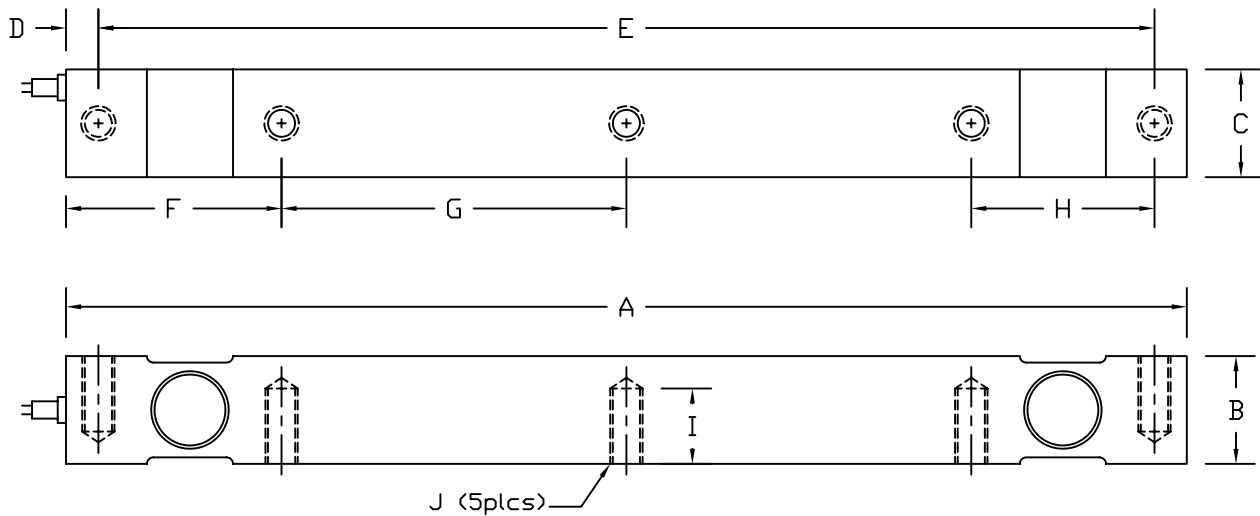

RATED CAPACITY	DIMENSIONS									
	A	B	C	D	E	F	G	H	I	J
25K	26.00	2.50	2.50	0.75	24.50	5.00	8.00	4.25	1.90	3/4-10UNC

## ▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00	Input Impedance	700 +/- 10 ohms
Nonlinearity	+/- 0.03% FS	Output Impedance	700 +/- 5 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Repeatability	+/- 0.01% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.02% FS	Compensated Temperature Range	-10°C - +40°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.0027% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.0015% of applied load/°C	Cable Length	30' Standard Cable
Cable Color Code	Input	Output	Seal Type
	Green +Excitation	White +Signal	Environmentally-Sealed, IP67
	Black -Excitation	Red -Signal	