

CGSB-1

▶ **S-BEAM**

▶ **ALLOY STEEL**
NTEP 1:10,000 Class III, Single Cell

CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737



CGSB ORDER INFORMATION PRICING^g SUGGESTED LIST PRICE

250 lb, 300 lb	\$ 165.00
500 lb, 750 lb, 1K, 1.5K, 2K, 2.5K	\$ 165.00
3K	\$ 325.00
5K, 10K	\$ 325.00


INTERCHANGEABLE PRODUCTS

Revere Transducers.....	363
Artech.....	20210
Rice Lake.....	RL20000

WEIGH MODULE AVAILABLE

Coti Global Sensors.....	ITCM
--------------------------	------

Main Dimensions and Accessories

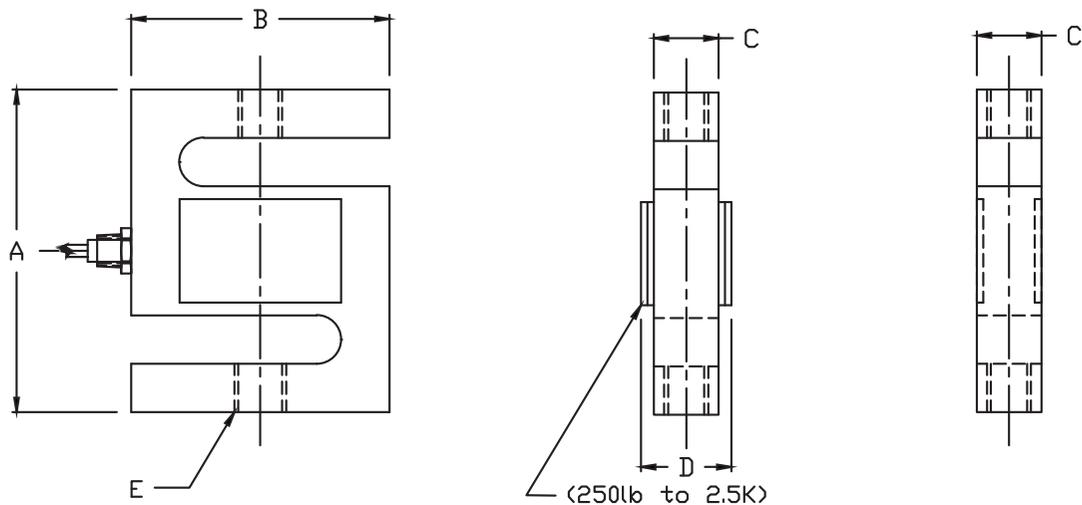

RATED CAPACITY	DIMENSIONS				
	A	B	C	D	E
250lb-300lb	2.50	2.00	0.50	0.75	1/4-28UNF
500lb-2.5K	2.50	2.00	0.75	1.00	1/2-20UNF
3K	4.00	3.00	1.00	-	1/2-20UNF
5K-10K	4.00	3.00	1.00	-	3/4-16UNF

→ **SPECIFICATIONS** ←

Rated Output (mV/V)	3.00	Input Impedance	385 +/- 10 ohms
Nonlinearity	+/- 0.03% FS	Output Impedance	350 +/- 3 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	2000 Megohms
Repeatability	+/- 0.01% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.02% FS	Compensated Temperature Range	-10°C - +40°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.0027% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.0015% of applied load/°C	Cable Length	20' Standard Cable
Cable Color Code	Input Output	Seal Type	Environmentally-Sealed, IP67
	Green +Excitation White +Signal		
	Black -Excitation Red -Signal		