

PD series

PROFESSIONAL DOCTOR SCALES

MEDICAL GRADE ACCURACY: WEIGHT • HEIGHT • BMI



Detecto Model
PD300



Detecto Model PD100
Low-Profile Physician Scale
with Body Mass Index



Detecto Model PD100 Low-Profile Physician Scale with Remote Display



Model PD100

Low-Profile Floor Scale with Remote Display

The PD100's remote display may be positioned on desks, counters, or even mounted on the wall (shown below) up to 87 inches / 220 cm from the scale. The LCD provides easy-to-view 1-inch-high (25 mm) readouts. Include the optional

DHR wall-mount digital height rod and model GBSS18-WM stainless steel handrails to create an all-digital clinical measurement station.



Optional model PRODOC-CASE carrying case for PD100



Model PD200

Space-Saving Physician Scale

The PD200 features a low-profile, angled display for easy measurement viewing. The PD100 and PD200 provide BMI (Body Mass Index) calculation by conveniently selecting your height with easy-to-use scroll keys while weighing.



Model PD200 Space-Saving Physician Scale



Model DHR Digital Height Rod with Wall-Mount Brackets

Model GBSS18-WM Stainless Steel Wall-Mount Handrails

Model PD100 Low-Profile Physician Scale with Body Mass Index



Optional P50 printer may be mounted to any of the PD300 series columns

09:28, 07/30/12
 BMI: 21.5
 Height: 175.5cm
 Weight: 68.5kg

EYE-LEVEL MEASUREMENT CONVENIENCE

The optional P50 direct thermal printer may be mounted on any of the ProDoc® PD300 series eye-level physician scales to print Time, Date, Height, Weight, and Body Mass Index. The P50 features two-button operation and RS-232 serial communication with the scale (cable included with printer).



Model PD300
 Eye-Level Physician Scale
 with Body Mass Index



Digital
 Height Rod
 Measures from
 43 - 79 inches
 110 - 200 cm

Model PD300DHR
 Eye-Level Physician Scale
 with BMI and Digital Height Rod



Mechanical
 Height Rod
 Measures from
 30 - 78 inches
 76 - 200 cm

Model PD300MHR
 Eye-Level Physician Scale
 with BMI and Mechanical Height Rod



PROFESSIONAL DOCTOR SCALES

Level Indicator

Adjustable Locking Feet



Built-in wheels for fast and easy transport

Deteco's ProDoc® Series Digital Physician Scales with Body Mass Index

offer medical-grade accuracy and durability from the brand you trust in clinical weighing at an economical price. The PD300DHR features time-saving digital weight and height measurement, so the patient simply steps on the scale, raises the height rod into position, and presses a key to automatically calculate their BMI. The PD300 series features comfort-height-level display of measurements for convenient viewing.




Multiple configurations to fit your weighing application

- Capacity: 550 lb - PD300 series; 480 lb - PD100/200
- 4-user memories and recall function
- 6 AA batteries (not included) or optional AC adapter
- Solid, stable base for patient assurance and accuracy
- Height measurement (available on models equipped with height rod)
- Body Mass Index (BMI) calculation
- Metric conversion (Weight and Height)
- Selectable Sleep Mode (up to 9 minutes)
- Selectable Auto Shut-off Feature (up to 9 minutes)
- Serial and USB ports on PD300 series
- Available with or without height rod
- Large 1-inch / 25-mm high LCD readouts




PD300 Series Keypad Features

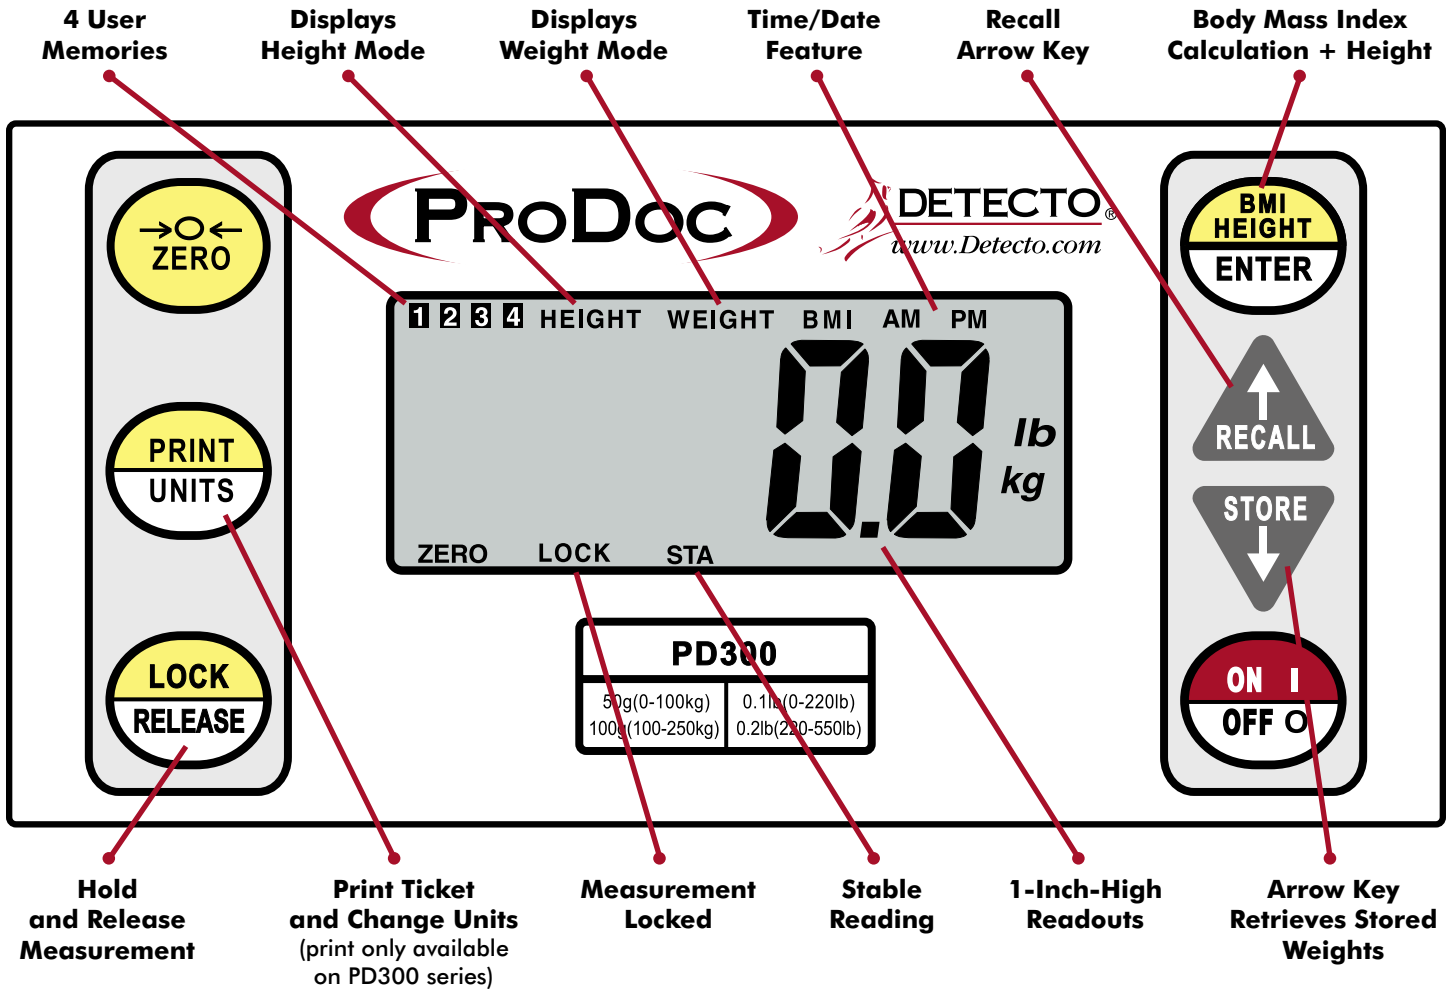

Features USB and Serial Connectivity for Efficient Patient Records

Back View of Indicator (PD300 Series Only Features USB and Serial Ports / Not Available on PD100-200)

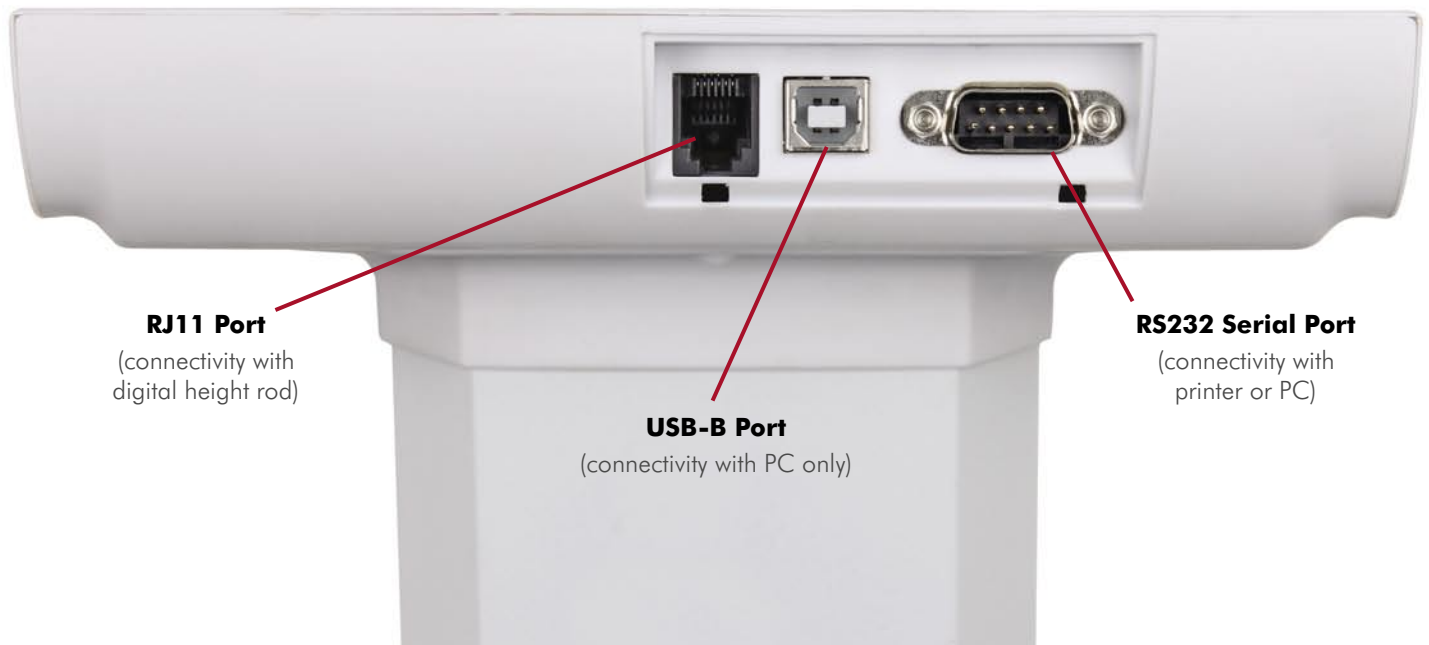



PD series
PROFESSIONAL
DOCTOR SCALES

PD SERIES SCALE SPECIFICATIONS

Model Number	PD100 (Floor Scale with Remote Display) PD200 (Floor Scale) PD300 (Eye-Level Scale) PD300DHR (Eye-Level Scale with Digital Height Rod) PD300MHR (Eye-Level Scale with Mechanical Height Rod)
Capacity PD100/PD200 PD300	480 lb x 0.2 lb (220 kg x 0.1 kg) 0-220 lb x 0.1 lb (0-100 kg x 50 g) 220-550 lb x 0.2 lb (100-250 kg x 100 g)
Weight Units	Pounds or Kilograms (selectable)
Power Requirements	Six (6) "AA" size Alkaline batteries (not included) OR an optional Medical device 9V AC/DC wall plug-in adapter (Cardinal part number PD-AC, includes USA plug). Also available UK plug (PD-UKPLUG) or EU plug (PD-EUPLUG).
Display	Five digit, seven segment, 1.0 in (25 mm) high LCD
Operating Temperature	50 to 104° F (+10 to +40° C)
Function Keys	ON/OFF, BMI HEIGHT/ENTER, LOCK/RELEASE, UNITS (PRINT/UNITS on PD300), ZERO, RECALL and STORE
Dimensions PD100 Display PD100 Base PD200 PD300 PD300DHR PD300MHR	5.25 in H x 7.87 in W x 2.125 in D (134 mm x 200 mm x 54 mm) 3.33 in H x 12.5 in W x 13.0 in D (85 mm x 318 mm x 330 mm) 8.75 in H x 12.6 in W x 16.9 in D (222 mm x 320 mm x 430 mm) 48.0 in H x 12.6 in W x 17.0 in D (1,219 mm x 320 mm x 433 mm) 48.0 in H x 14.0 in W x 17.0 in D (1,219 mm x 354 mm x 433 mm) 48.0 in H x 14.0 in W x 17.0 in D (1,219 mm x 354 mm x 433 mm)

P50 PRINTER SPECIFICATIONS (for use with PD300 series)

Printing Type	Direct Thermal Dot Line
Number of Dots/Line	384 dots
Resolution	203 dpi (8 dots/mm W x 16 dots/mm H)
Max. Printing Speed	1.58 in/second (40 mm/second)
Max. Paper Roll Diameter	1.97 in (50 mm)
Printing Width	1.89 in (48 mm)
Operating Temperature	68 to 122° F (20 to 50° C)
Power Supply	AC Adapter 100 - 240VAC input, 12V [2A] output
Connectivity	RS-232 communication with scale (cable included)
Dimensions	4.33 in W x 4.33 in D x 4.21 in H (110 mm x 110 mm x 107 mm)

Detecto Scale reserves the right to improve, enhance, or modify features and specifications without prior notice.



Sold By: