

Ishida IGX and IGB Series



APPROVALS



STANDARD FEATURES

- Ability to toggle between lb and kg
- Stainless steel cover with die cast base
- Checkweighing function
- Configurable display resolution: 1/3000, 1/6000, 1/7500 (NOTE: Legal for Trade setting is 1/3000)
- 10 PLUs for storing tare, upper limit, lower limit

IGX:

- Display, VFD
- Power, 120VAC
- Internal buzzer

IGB:

- Display, LCD
- Power, (2) D-size batteries* or optional AC adapter
- Selectable automatic power-off function
- Batteries not included

SPECIFICATIONS

Capacity:

- IGX 150 lb/60 kg x .05 lb/0.02 kg
- IGX 300 lb/150 kg x .1 lb/0.05 kg
- IGB 150 lb/60 kg x 0.05 lb/0.02 kg
- IGB 300 lb/150 kg x 0.1 lb/0.05 kg

Accuracy:

- Configurable 1/3000**, 1/6000, 1/7500
- **Legal for Trade setting

Display:

- IGX: Vacuum Fluorescent Display (VFD), 25 mm
- IGB: Liquid Crystal Display (LCD), 29 mm

Foot Dimensions:

- 2 1/1 in dia, 3/4 in height, 2 1/4 in height including stem

Display Items:

- Weight: 5 digits, Center of zero, Tare, Checkweighing: Over "H", Under "L"

Electrical Power:

- IGX: 120V
- IGB: "D" size batteries or optional AC adapter (batteries not included) 500 hour battery life

Operating Temperature:

- 23°F to 109°F (-5°C to 40°C)

Warranty:

- One-year limited warranty

Approvals:


- NTEP CC 05-020, Class III, 3,000d

PART NUMBER/PRICE

PART #	DESCRIPTION	CAPACITY	PLATFORM DIMENSIONS	EST. SHIP WEIGHT	PRICE
84989	IGX	150 lb/60 kg x .05 lb/0.02 kg	15.75 x 21.65 x 5.43 in	43 lb	Consult
84990	IGX	300 lb/150 kg x 0.1 lb/0.05 kg	15.75 x 21.65 x 5.43 in	43 lb	Consult
84991	IGB	150 lb/60 kg x 0.05 lb/0.02 kg	15.75 x 21.65 x 5.43 in	41 lb	Consult
84992	IGB	300 lb/150 kg x 0.1 lb/0.05 kg	15.75 x 21.62 x 5.43 in	41 lb	Consult

OPTIONS/ACCESSORIES

PART #	DESCRIPTION	PRICE
75473	AC adapter (IGB only)	Consult
86545	Additional operating manual (IGX/IGB)	Consult

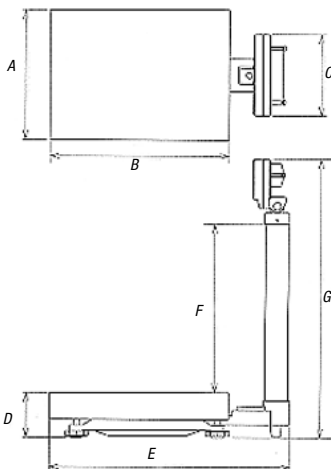

DRAWING DIMENSIONS

Dimension	Value	Dimension	Value
A	15.75 in (400 mm)	E	29.06 in (738 mm)
B	21.65 in (550 mm)	F	22.00 in (560 mm)
C	9.84 in (250 mm)	G	33.70 in (856 mm)
D	5.43 in (138 mm)		