


# CW-90XB Light-Capacity Bench Scales

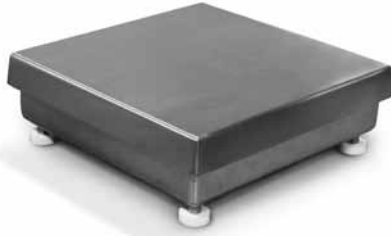

## STANDARD FEATURES

- 304 stainless steel construction
- Five point overload protection
- Specially designed adjustable support feet provide exceptional traction and will not scratch surfaces
- IP69K, stainless steel hermetically sealed load cell

## APPROVALS



Measurement  
Canada  
Approved



## SPECIFICATIONS

### Load Cell, NTEP Certified:

Stainless steel and hermetically sealed, IP69K

### Output Impedance:

350 ohms

### Maximum Overload:

180% to 200% depending on capacity

### Overload Protection:

Five point, independently adjusted

### Cable Length:

34 in or 10 ft

### Compensated Temperature Range:

14°F to 104°F (-10°C to 40°C)

### Warranty:

Three years including water ingress

### Approvals:

NTEP CC 95-072, Class III 5,000d  
Measurement Canada AM-5082, Class III 5,000d



## PART NUMBER/PRICE

PART #		PLATFORM CAPACITY	DIMENSIONS		EST. SHIP WEIGHT	PRICE
10 ft cable	34 in cable					
112600	106143	5 lb	10 x 10 x 4.25 in		14 lb	Consult
112602	106144	10 lb	10 x 10 x 4.25 in		14 lb	Consult
112604	106145	25 lb	10 x 10 x 4.25 in		14 lb	Consult
112606	106146	25 lb	12 x 12 x 4.25 in		17 lb	Consult
112608	106147	50 lb	12 x 12 x 4.25 in		17 lb	Consult
112610	106148	100 lb	12 x 12 x 4.25 in		17 lb	Consult

## OPTIONS/ACCESSORIES

PART #	DESCRIPTION	PRICE
112044	12 in column for IQ plus® 355, IQ plus® 210, 320IS (without battery option), 320IS plus (without battery option), IQ plus® 390-DC, IQ plus® 590-DC, 420 plus®, CW-90, CW-90X and 480 Legend	Consult
112045**	18 in column for IQ plus® 355 or IQ plus® 210, 320IS (without battery option), 320IS plus (without battery option), IQ plus® 390-DC, IQ plus® 590-DC, 420 plus®, CW-90, CW-90X and 480 Legend	Consult

\*\* Not recommended for use with scale bases smaller than 12 in x 12 in

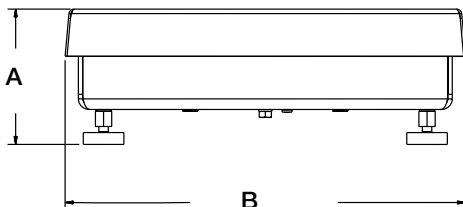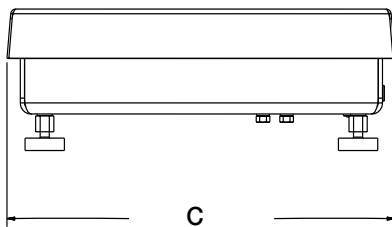

### DRAWING DIMENSIONS

#### 10 in x 10 in

A	4.25 in (107.95 mm)	C	10.37 in (263.40 mm)
B	10.37 in (263.40 mm)		

#### 12 in x 12 in

A	4.25 in (107.95 mm)	C	12.37 in (314.20 mm)
B	12.37 in (314.20 mm)		