

CG-1130

▶ SINGLE POINT

▶ STAINLESS STEEL

CENTRAL CAROLINA SCALE, INC 5393 FARRELL ROAD SANFORD NC 27330 (919) 776-7737




CG-1130 ORDER INFORMATION **PRICINGⁱⁱ SUGGESTED LIST PRICE**

7.5 Kg	\$ 250.00
15 Kg	\$ 250.00
30 Kg	\$ 250.00
50 Kg	\$ 250.00
100 Kg	\$ 250.00

INTERCHANGEABLE PRODUCTS

Tedea-Huntleigh.....	1130
Weigh-Tronix	MK29

Main Dimensions and Accessories

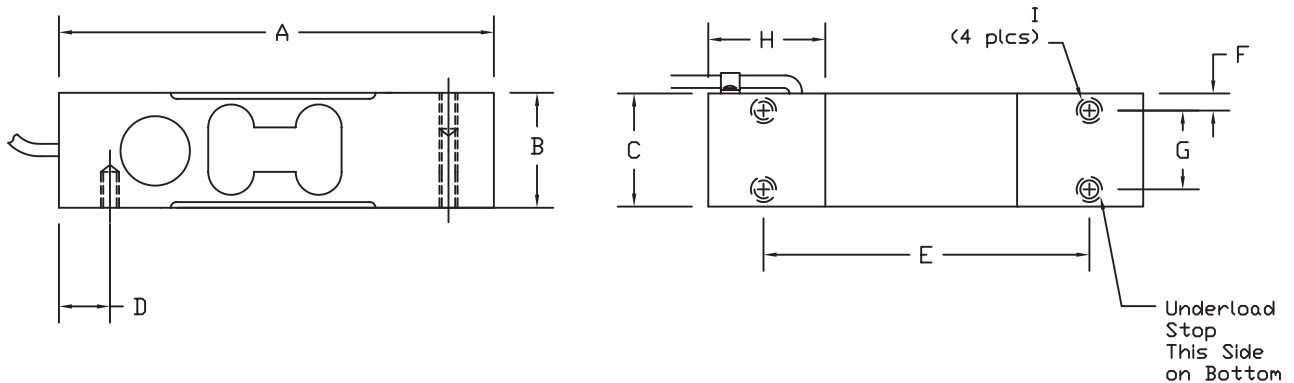

RATED CAPACITY	DIMENSIONS									
	A	B	C	D	E	F	G	H	I	
7.5-100KG	5.31	1.18	0.98	0.57	4.17	0.19	0.59	1.37	1/4-20UNCx0.56dp	

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00 +/- 10%	Input Impedance	385 +/- 10 ohms
Nonlinearity	+/- 0.03% FS	Output Impedance	350 +/- 3 ohms
Hysteresis	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Repeatability	+/- 0.02% FS	Excitation Voltage	10V AC/DC (20V Max)
Creep (30 minutes)	+/- 0.03% FS	Compensated Temperature Range	-10°C - +40°C
Zero Balance	+/- 1.00% FS	Operating Temperature Range	-20°C - +60°C
Temperature Effect on Zero	+/- 0.002% of rated output/°C	Safe Overload	150% FS
Temperature Effect on Output	+/- 0.001% of applied load/°C	Cable Length	10' Standard Cable
Cable Color Code	Input	Output	Seal Type
	Green +Excitation	White +Signal	Environmentally Sealed, IP67
	Black -Excitation	Red -Signal	Max Platform Size:
			400 X 400 mm